


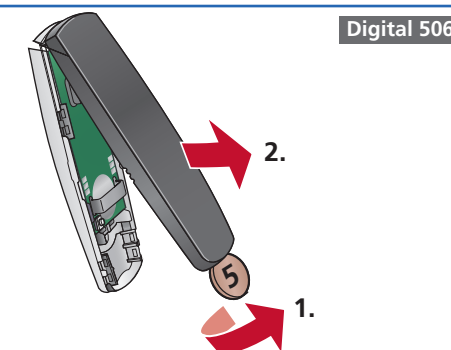
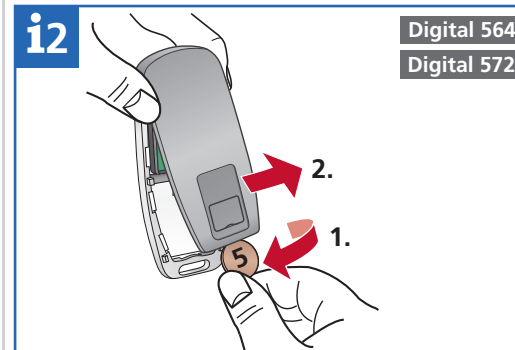
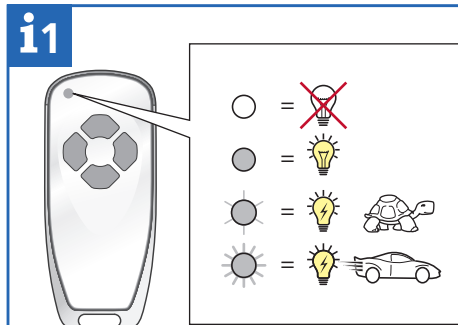


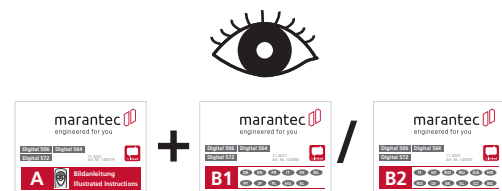


1 Digital 572

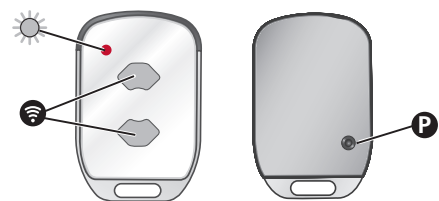






Digital 564

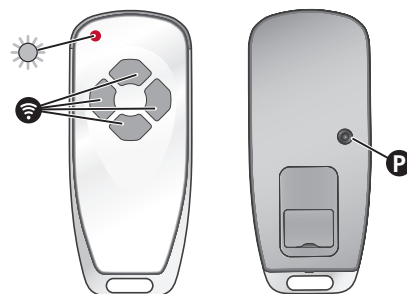





Digital 506








2

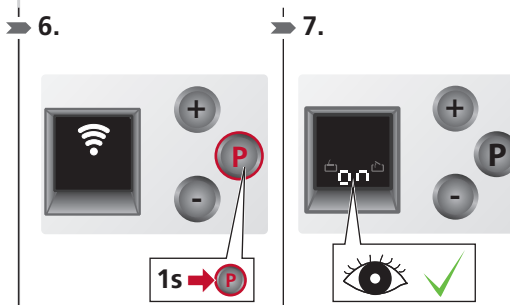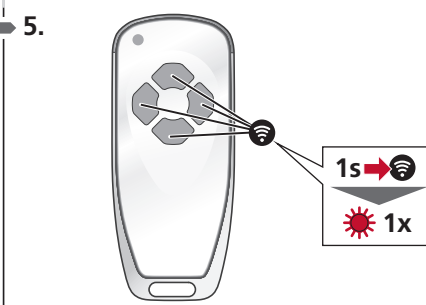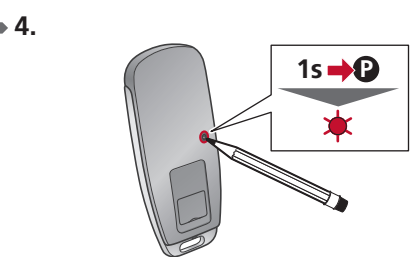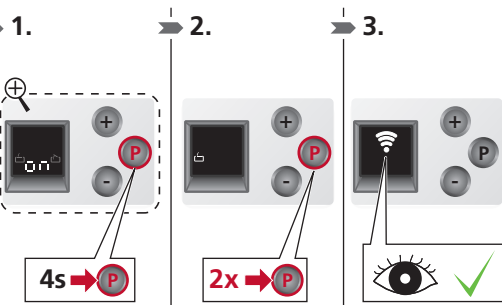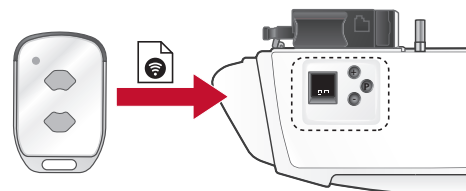

3

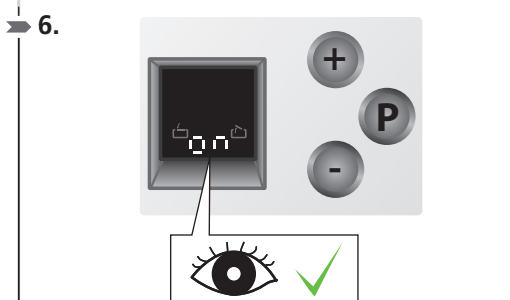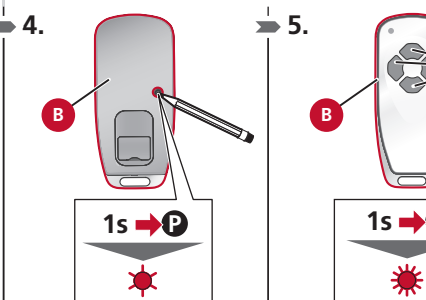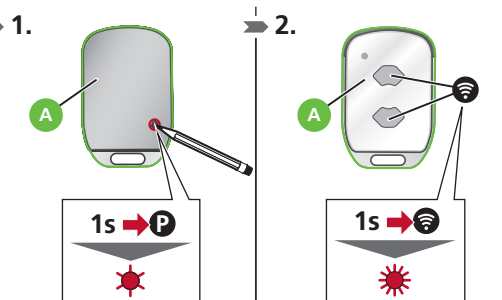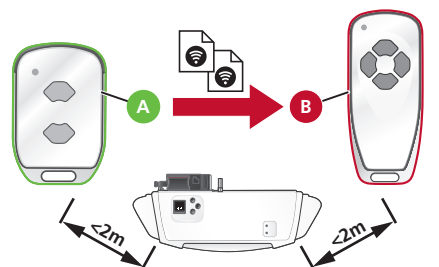

4

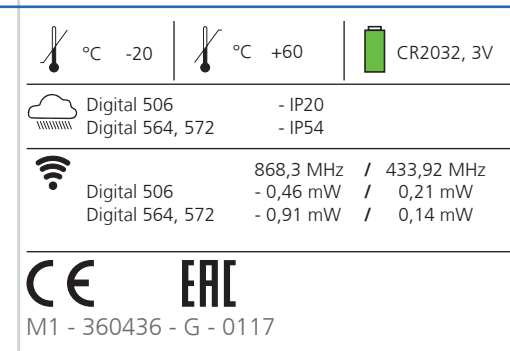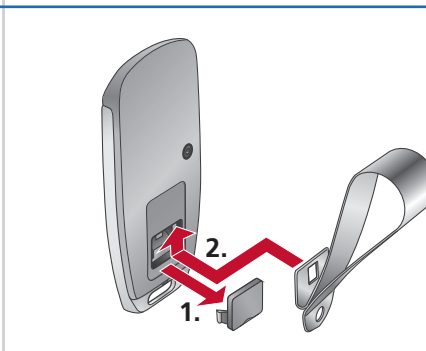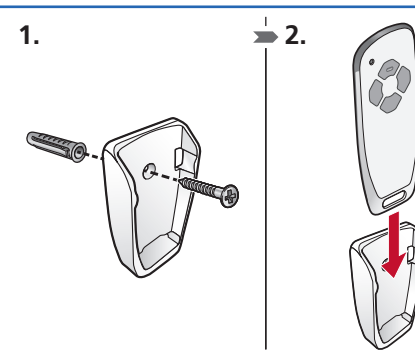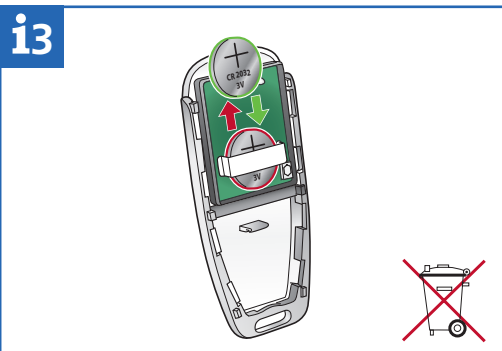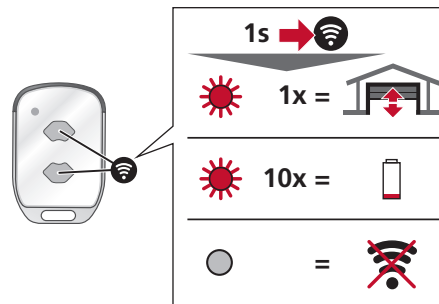

 °C -20	 °C +60	 CR2032, 3V
Digital 506	- IP20	
Digital 564, 572	- IP54	
Digital 506	868,3 MHz / 433,92 MHz	
Digital 564, 572	- 0,46 mW / 0,21 mW	
	- 0,91 mW / 0,14 mW	